



High Performance, Bluetooth® wireless technology enabled UHF RFID reader



1128 Bluetooth® UHF RFID Reader



Data Collection Performance Like No Other

TSL's new 1128 Bluetooth® UHF RFID reader provides new levels of RFID performance. With its R2000 core and range of interchangeable high performance antennas, the 1128 performs like no other reader giving the user the highest levels of flexibility currently available in today's market. Designed to read and write to EPC Class 1 Gen 2 (ISO18000-6C) tags, the 1128 can also be configured with class leading high performance 2D data scanning to bring unparalleled data collection capabilities to any host it is connected to. The Motorola SE4500 engine incorporates fast-pulse illumination and fast sensor shutter speeds, delivering outstanding motion tolerance and class leading 1D and 2D data capture.

Platform Independent UHF RFID Reader

Use existing Bluetooth® wireless technology enabled¹ host devices including Enterprise Handhelds, Consumer Phones, Touchscreen MP3 players, Tablets and PC's - the 1128 will bring high performance RFID and 2D scanning to all these devices running a wide range of Operating Systems. The 1128 Bluetooth® UHF RFID reader can also be tethered to a PC using a USB cable.

Extensive software support is available for a wide range of platforms including code samples, demonstration applications and source code.

As Easy As ABC....

The new 1128 Bluetooth® UHF RFID reader incorporates TSL's unique ASCII protocol for faster and easier application development. This sophisticated parameterized ASCII protocol provides the developer a powerful set of commands that carry out multiple actions locally within the reader. This approach enables multiple tag operations executed using simple pre-configured ASCII commands which not only speeds integration of the reader into applications but also abstracts the developer from some of the complexities of the underlying Native API and ultimately results in un-paralleled levels of performance.

A Configuration To Suit Your Application

The choice of host device is yours - from low cost touchscreen MP3 players through to fully featured Enterprise Handheld Terminals. The choice of ergonomic style includes a compact slim line grip through to a comfortable trigger handle for scan intensive RFID and 2D bar code data collection applications.

EPC data can be stored on an optional Micro SD memory card (at least 25 million Transponder EPCs on a typical 2GB card). This allows logging of all transponder EPC readings and provides the ability to collect data even if USB or Bluetooth® communication channels are not available.

Features:

High Performance Bluetooth® Multi-modal Data Capture

UHF RFID and 2D barcode data capture in one integrated Bluetooth® device

Hardware Platform Independence

Operates with wide variety of Bluetooth® wireless technology enabled host devices including touchscreen MP3 players, phones, tablets, Enterprise Handhelds and PC's

OS Independence

Operates with Windows Mobile, WinCE, Windows XP, 7, 8, Android, iOS

Batch Data Collection

Integrated high capacity Micro SD data card and real time clock for extended batch data collection independent of host connection

Flexible Configuration

Unique interchangeable high performance antennas including optional 2D scanning and trigger handle with a range of device specific mounts for holding phones and MP3 players

High Performance barcode scanning

Integrated Motorola SE4500 imaging engine provides class leading barcode scan performance via its unique patent pending fast pulse illumination which delivers outstanding motion tolerance and class leading 1D and 2D data capture

TSL 1128 Specifications

Physical and Environmental Characteristics

Dimensions (LxWxH):	16.0 cm x 7.7 cm x 16.9 cm – Trigger handle 16.0 cm x 7.7 cm x 9.7 cm – Slimline grip
Weight:	380 g / 13.4 oz (including battery & trigger handle)
User input:	Trigger button
User feedback:	Speaker, vibration motor, LED
Power:	Removable, rechargeable 4.2 volt Lithium Polymer 2200 mAh battery pack, 8.4 watt hrs
Enclosure materials:	Black Lexan EXL9330 PC Yellow Lexan 943A PC

Performance Characteristics

RFID engine:	TSL custom module with embedded Impinj R2000
Communication protocols:	TSL ABC (Parameterised ASCII command set) Impinj binary
Memory:	Supports up to 2 GB Micro SD CARD
Compatible Host devices (Bluetooth®):	Android, iOS, Windows CE, Windows Mobile 5/6.1/6.5 or Windows XP/Vista/7. Host device must have Bluetooth® wireless technology functionality.
Compatible Host devices (USB):	Any USB host with FTDI VCP driver support (Windows, Linux, Mac, Android)

Environmental

Operating Temp.:	-4 °F to 140 °F / -20 °C to 60 °C
Charging Temp.:	41 °F to 104 °F / 5 °C to 40 °C
Storage Temp.:	-40 °F to 158 °F / -40 °C to 70 °C
Humidity:	5% to 95% non-condensing
Drop Spec:	Multiple drops to concrete: 4 ft./1.2 m ambient, 3ft / 0.9m across the operating temperature range
Tumble:	500 0.5 metre tumbles at room temperature (1,000 cycles)
Environmental Sealing:	IP54
Electrostatic Discharge (ESD):	± 15kVdc air discharge; ± 8kVdc contact discharge
MIL-STD 810F:	Meets and exceeds applicable MIL-STD 810F for drop, tumble and sealing

RFID Performance

Standards supported:	EPC Class 1 Gen 2
Nominal read range ² :	up to 13 ft. / up to 4m
Nominal write range ² :	up to 4 ft. / up to 1.22 m
Field:	150-degree forward facing (approx.) measured from front of device
Antenna:	Detachable, Circularly Polarized with optional 2D scanner
Frequency Range:	EU: 865-868MHz; US: 902-928MHz
Output Power:	10mW to 800mW
Antenna options:	High Performance CP High Performance CP with 2D Imager Custom antennas available

Barcode Scanning

Imager:	Motorola SE4500 2D imager		
Sensor Resolution:	752 x 480 pixels		
Field of View:	Horizontal: 40 °, Vertical: 25 °		
Focal Distance:	SR: 8 in. DL: 5.3 in. HD: 2.9 in.		
Aiming LED (VLD):	655 ±10 nm Laser		
Illumination Element:	625 ±5 nm LEDs (2x)		
Min. Print Contrast:	Minimum 25%		
Symbologies Supported:	1D: All major codes 2D: PDF417, MicroPDF417, Composite, RSS, TLC-39, Datamatrix, QR code, Micro QR code, Aztec, MaxiCode Postal Codes: US PostNet, US Planet, UK Postal, Australian Postal, Japan Postal Dutch Postal (KIX)		
Ranges ³ :	DL Focus	Near	Far
	5 mil Code 39	1.4 in./36 mm	7.3 in./185 mm
	100% UPC	1.6 in./41 mm	12 in./305 mm
	5 mil PDF417	2.8 in./71 mm	4.5 in./114 mm

Bluetooth® wireless technology

Bluetooth®:	Bluetooth® Version 2.1 SPP profile HID Profile (future) Apple iAP
Bluetooth® Class:	Class 2
Bluetooth® Range ⁴ :	10m
Bluetooth® pairing:	PIN, Simple Secure Pairing, NFC OOB Pairing (TBA)

Peripherals and Accessories

External interface:	MicroUSB connector for battery charging, and USB connectivity.
USB operating modes:	Tethered for real time data capture in conjunction with SmartWedge software. Download of stored scan data.
Optional desktop charger:	TSL 1136 4-Slot battery charger
Other Accessories:	Adapter mounts for a variety of smartphones, handheld terminals and touchscreen MP3 players Slimline Grip, Trigger Handle

Regulatory

General:	Approved for use in the US, Canada, Europe
Electrical Safety:	Certified to UL60950-1, CSA C22.2 No. 60950-1, IEC 60950-1, EN 60950-1
EMI/RFI:	USA: FCC Part 15 Canada: ICES 003 Class B EU: EN 301 489-3, EN 301 489-1, EN 301 489-17, EN 302-208, EN55022 Class B, EN55024
Laser Safety:	IEC Class2/FDA Class II in accordance with IEC60825-1/EN60825-1, 21CFR1040.10

Warranty


The TSL 1128 reader is warranted against defects in workmanship and materials for a period of one year (12 months) from date of shipment, provided the product remains unmodified and is operated under normal and proper conditions.

¹ Compatible Bluetooth® stack required in the Host device

² Tag Read/Write performance is dependent on tag type, items tagged, number of tags in the field and other radio and environmental factors

³ Artificial lighting can affect scanning performance

⁴ Open field

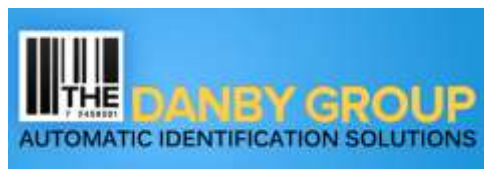

For more information, please contact:
The Danby Group
Atlanta, GA
800.262.2629
www.danbygroup.com